


Dimensions

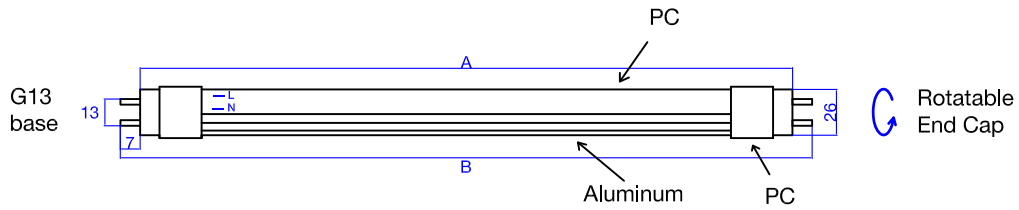


Specification


Model No.	Power	Lumen	Dimension (mm)	
			A (max)	B (max)
04.LT.T8R.60	8W	880lm	590	604
04.LT.T8R.90	12W	1320lm	894	908
04.LT.T8R.120	18W	1980lm	1199	1213
04.LT.T8R.150	24W	2640lm	1500	1514
04.LT.T8R.180	30W	3300lm	1763	1778

1. Input 100-240VAC, RA>80, PF>0.95, beam angle 140°.
2. PC milky cover. PC round end caps, white colour.
3. Life time 30000Hours, working temperature -20°C-50°C.

Installation

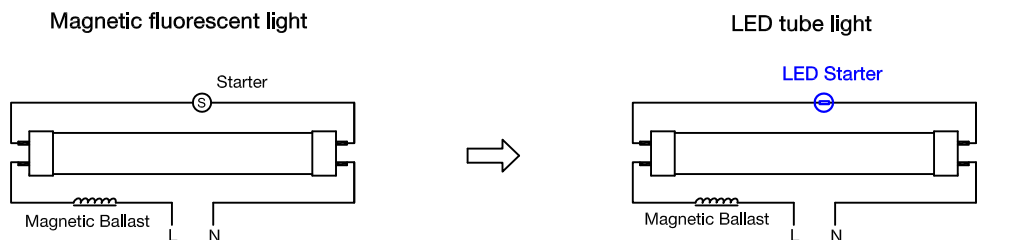

**!** Some models of magnetic ballast can not be rectified with the LED starter. In this case, it is necessary to re-wire as show below

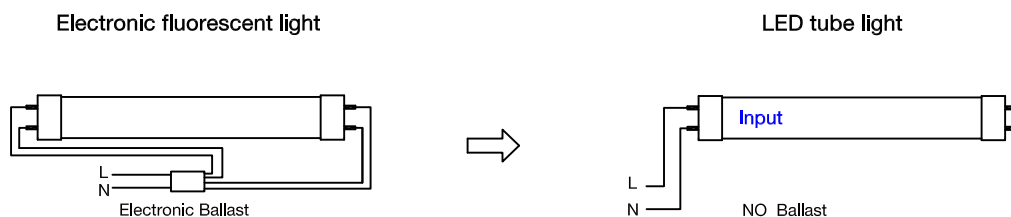

Doc. Nr.	04.LT.T8R	Date	30.JUL.2013
Control	E41073F-DJ		