



DATA SHEET
FCL SPOTS WITH JBC SYSTEM
04.FCL.JBC



Junction system 04.FCL.JBC.MP

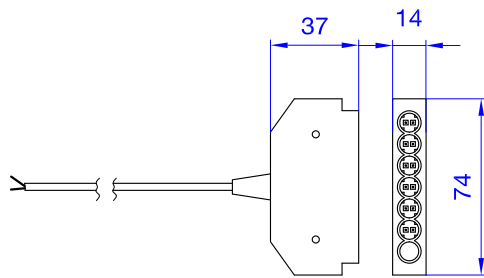

04.JBC.250.D6

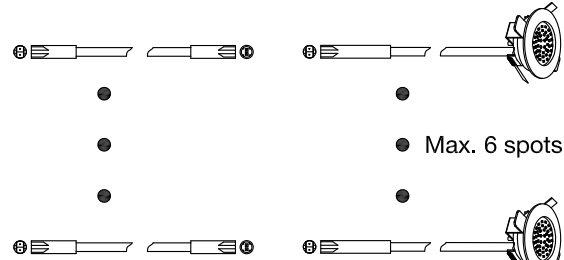

Optional:
04.JBC.EXT.1M


04.FCL.x1xx.J09
or 04.FCL.x2xx.J09

● Max. 6 spots

Technical features


Input voltage	10-30V DC/AC or 200-240VAC	Cable length	1m	Spot power	3W
Max. current	2.5A	Cable type	H03VVH2-F 2x0.75mm ²	Spot lumens	300lm
Max. output channels	6 channels	Spot driver	Internal driver	Spot housing	Aluminium

Emergency junction system 04.FCL.JBC.EM

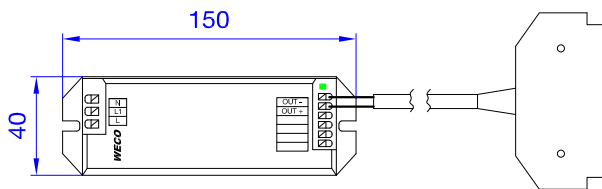

04.EM12.12W.60M

04.JBC.250.D6

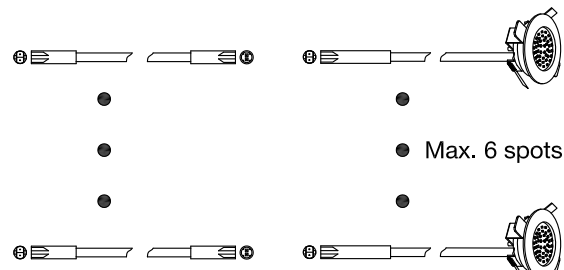

Optional:
04.JBC.EXT.1M

04.FCL.x1xx.J09

● Max. 6 spots



- 1x FCL spot 6hrs emergency light
- 2x FCL spots 3hrs emergency light (UK regulation)
- 6x FCL spots 1hrs emergency light (EN 81-20)

Technical features

Input voltage	220VAC 50Hz	Recharging time	> 24 hours	Spot power	3W
Emerg. output	12-30VDC / 0.6A	Cable length	1m	Spot lumens	300lm
Emerg. power	8 to 20W	Cable type	H03VVH2-F 2x0.75mm ²	Spot housing	Aluminium

Doc. Nr.	04.FCL.JBC	Date	15.SEP.2020
Control	E41130F-DJ		