



EMERGENCY PACK

07.EMA.20.0606 / 07.EMA.31.0613 / 07.EMA.31.1213
07.EMA.33.0613 / 07.EMA.33.1213 / 07.EMA.4P.1213

USER MANUAL

WECO


Version UM.EMA.22C.V1.ENG




- The product must be installed by professional technicians.
- The mains power must be isolated before installation.
- This product is for indoor use only.
- The battery pack must be recharged every 6 months.
- The battery pack must be changed after 4 years.




WIRING

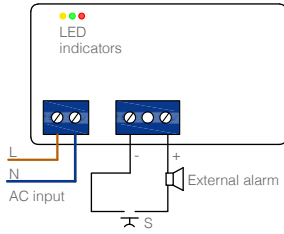


07.EMA.20.xxxx

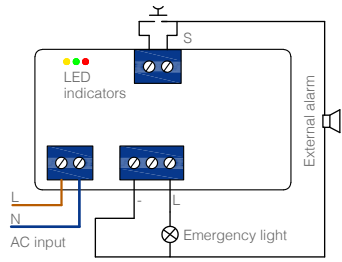

07.EMA.31.xxxx

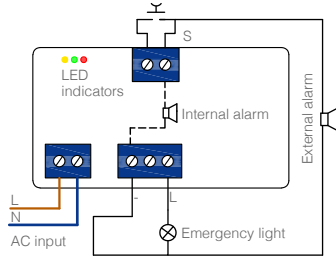


07.EMA.33.xxxx

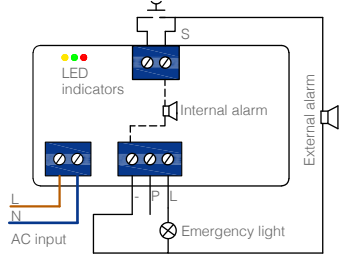

NOTE: P = Stabilized output

07.EMA.4P.xxxx

DIMENSIONS AND LED INDICATORS

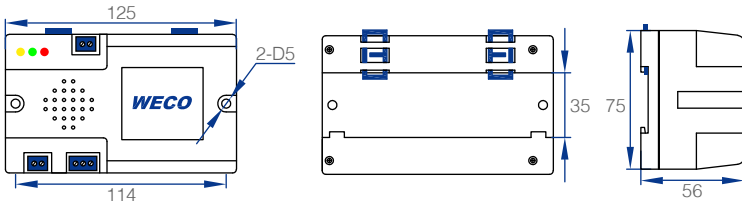

LED INDICATORS STATUS

● Charging
● Full charge
● Emergency or faulty

TECHNICAL FEATURES

Model	07.EMA.20.0606	07.EMA.31.0613	07.EMA.33.0613	07.EMA.31.1213	07.EMA.33.1213	07.EMA.4P.1213
Specification						
Input voltage	100VAC - 240VAC					
Output	6VDC, 0.6A	6VDC, 1.3A	6VDC, 1.3A	12VDC, 1.3A	12VDC, 1.3A	12VDC, 1.3A
Emergency power	2W alarm	5W light + 2W alarm				
Emergency time	120mins@2W	60mins@5W				
Internal alarm	N/A	N/A	90dB	N/A	90dB	90dB
Charging time	> 10 hours					
Battery type	3.7V, 1200mAh	3.7V, 2000mAh	3.7V, 2000mAh	7.4V, 2000mAh	7.4V, 2000mAh	7.4V, 2000mAh
Working temperature	-25°C to +50°C					
Storage temperature	-25°C to +80°C					